


# Customer test assembly

**Camera**  
<http://camera.my-rex.net/>  
or  
<http://217.6.86.39/>



Web2go\*



**REX 300**

Toolbox example via VPN  
(shDIALUP\*\*)

<http://192.168.0.100>

Login

guest admin Go

**S7 Communication via VPN**  
(shDIALUP\*\*)

NETLink® station IP: 192.168.0.100


**NETLink® Switch**

web interface  
<http://217.6.86.44>


**S7 Communication**

NETLink® station IP: 217.6.86.44

**FLEXtra® multiRepeater**

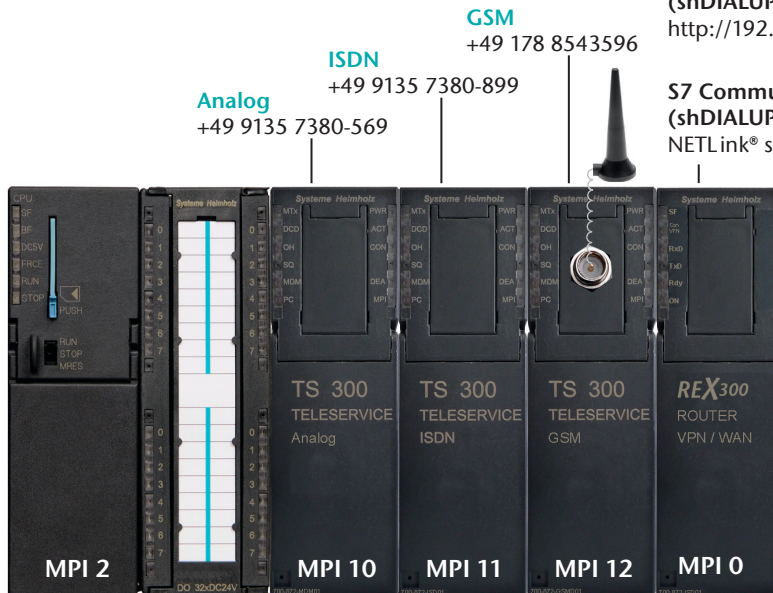

MPI 13

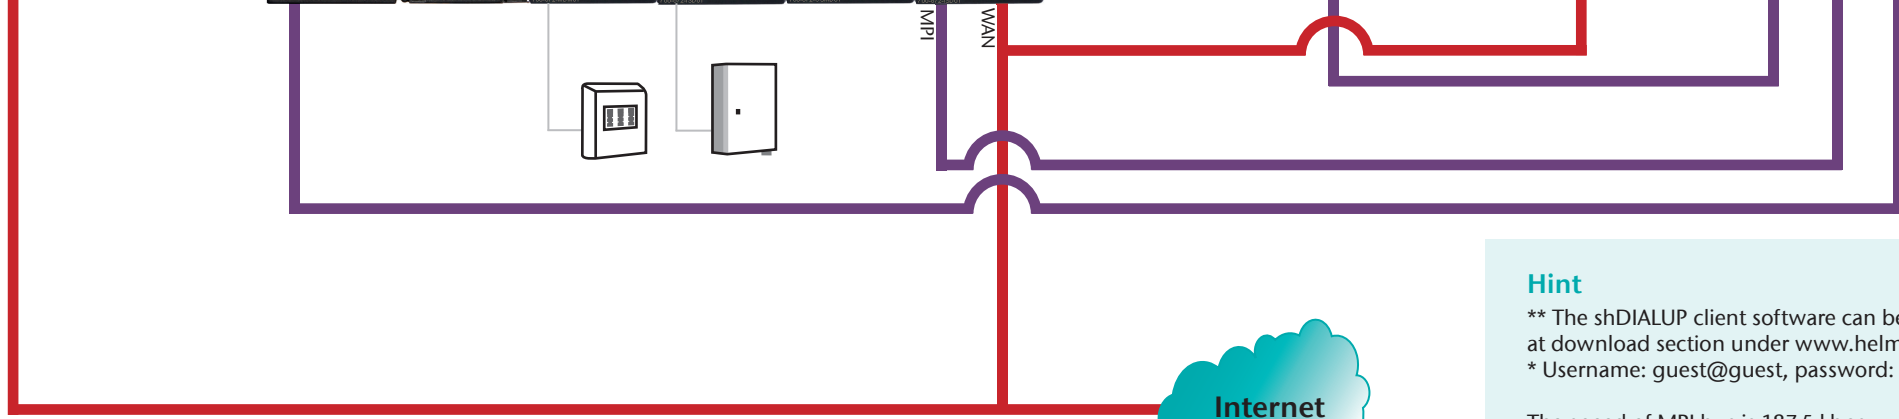

**Hint**

\*\* The shDIALUP client software can be downloaded at download section under [www.helmholz.com](http://www.helmholz.com).  
\* Username: guest@guest, password: admin

The speed of MPI bus is 187.5 kbps.

For your visual monitoring you can see the test assembly with a camera (see left side).